




CATALOG



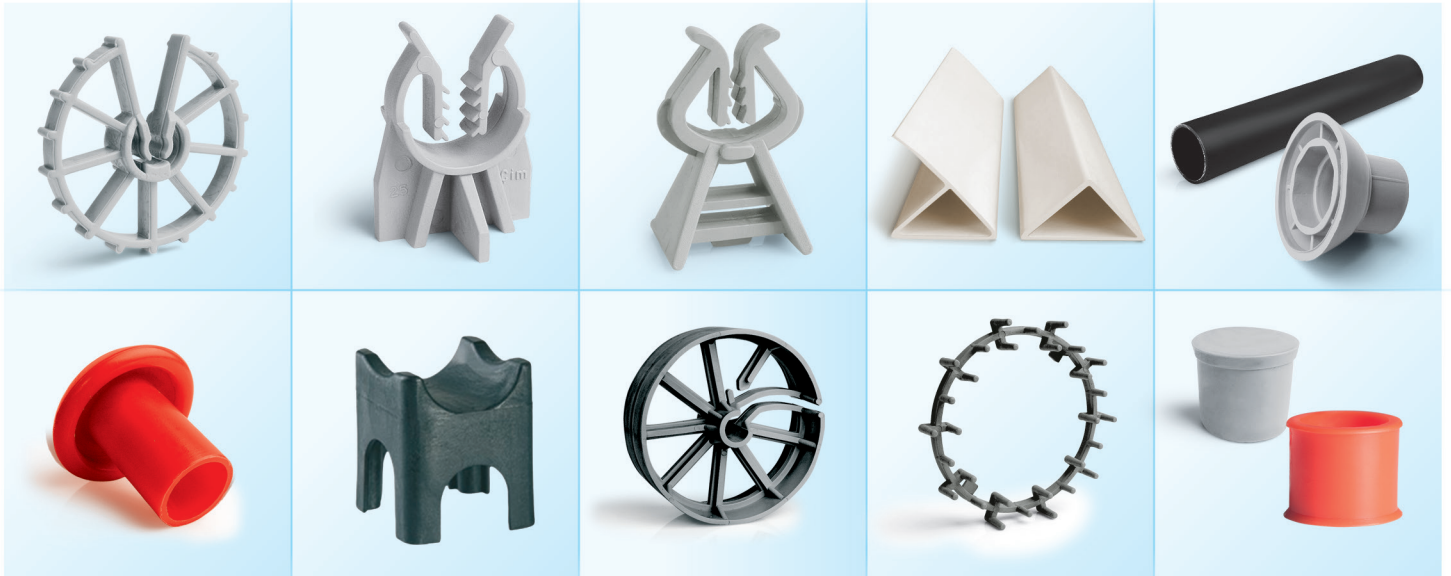

COMPANY PROFILE

Our company was found in 1992 and has been produced with plastic rebar spacers, pvc chamfers, pvc pipes and heads, tile spacers, pvc anchors exc. with proffesional, younger and dynamic team that goal is customer satisfaction since 1998. The company has been CIM PLASTIC as a brand in sector. Our products have been international market with quality, fast service and customer satisfaction like they have been served to all regions of domestic market in Turkey.

Our productions are manufactured by full automatic injection and extrusion machines are controlled in 24 hours. We have been furnishing services to our customers with more than 200 products. Our company which is in continious progress of development and accepts all kind of offers and compliants.

WHAT IS CONCRETE COVER?

It is a distance protect rebar from corrosion, fire exc. negative factors and making combination between concrete and rebars. Our products give this distance. It generally uses 6 pieces per m² if the quality of spacers is enough.

Combination of steel and concrete is very important. The resistance of steel against corrosion is low. Steel components are to be subjects to corrosion when the concrete cover spacers are not used. It cannot be solved even if it shapes with grout. The rusted iron lost its figures quickly in concrete when the corrosion start. This situation results in reduction of buildings bearing capacities and low resistance against earthquakes.

Why the concrete cover is important has been recognised after our painful earthquakes. We thank all our construction contractors and sub-contractors use concrete cover spacers. Also, we appreciate our customers who trust our quality and services and prefer our products.

Best Regards,

INDEX

WHEEL SPACERS	4
WHEEL SPACERS WITH LEGS	5
RING SPACER	5
HEAVY REBAR SPACERS	6
REBAR CLIPS	7
CUBIC SPACER	7
REBAR CLIPS PRECAST TYPE	7
CIRCULAR SPACERS	8
RAIL SPACERS	8
BISCUIT SPACER	8
PILE CAGE SPACERS	9
ANCHOR ROPE SEPERATOR CONNECTOR ELEMENTS	9
PIPE FOR PROTECTION TIE-ROD	10
TIE-ROD CONICAL	10
PLASTIC CONE FOR PIPE	11
CONIC STOPPER	11
PIPE STOPPER WITH CAP	11
CONICAL HEAD WITH STOPPER	12
REDUCTOR CAP OF WATER STOPPER	12
PVC CHAMFERS WITH AND WITHOUT EDGE	13
TRAPEZ CHAMFER	14
T PROFILE	14
SQUARE CEMENT FLOOR TYPE MONTAGE ELEMENT	15
SEGMENT IN TUNNEL ANCHOR	16
CONCRETE INJECTION ELEMENT FOR TUNNELS	16
RAIL ANCHOR	17
RAIL ANCHOR CAP	17
SAFETY CAP FOR TIE-ROT BAR (MUSHROOM TYPE)	18
SAFETY CAP FOR TIE-ROT BAR (SANDGLASS TYPE)	18
TRAPEZ BOLT ANCHOR	19
TIE-ROT BAR	19
ANCHOR NUT	20
TIE-ROT PLATE	20
WATER STOPPER (THERE ARE TWO TYPES OF WATER STOPPER)	21
SPRING CLAMP	21



WHEEL SPACERS

Used for vertical rebars and it gives the required distances between form work and rebars. We can produce for the special diameters of rebars and the distances. Clutch legs perform holing varieties of rebar sizes.

Code	Height	Bar Diameter	Package
11010	10 mm	6-10 mm	1000 pcs./pack
11015	15 mm	6-12 mm	1000 pcs./pack
11115	15 mm	12-18 mm	1000 pcs./pack
11020	20 mm	6-12 mm	1000 pcs./pack
11025	25 mm	6-14 mm	1000 pcs./pack
11125	25 mm	12-18 mm	1000 pcs./pack
11030	30 mm	8 -14 mm	1500 pcs./pack
11035	35 mm	8-14 mm	1000 pcs./pack
11130	30 mm	16-20 mm	1000 pcs./pack
11040	40 mm	12-18 mm	500 pcs./pack
11050	50 mm	12-30 mm	500 pcs./pack
11150	50 mm	10-20 mm	500 pcs./pack
11060	60 mm	8-16 mm	250 pcs./pack
11075	75 mm	8-18 mm	250 pcs./pack

WHEEL SPACERS WITH LEGS


These spacers have special legs at the bottom are used for horizontal and vertical rebars. It can be used for the heavy rebars. The ballpoints on the legs increase the carrying capacity.

12025



Code	Height	Bar Diameter	Package
12015	15 mm	8-12 mm	1000 pcs./pack
12025	25 mm	8-14 mm	1000 pcs./pack
12030	30 mm	8-18 mm	2000 pcs./pack
12040	40 mm	8-22 mm	1000 pcs./pack


11250

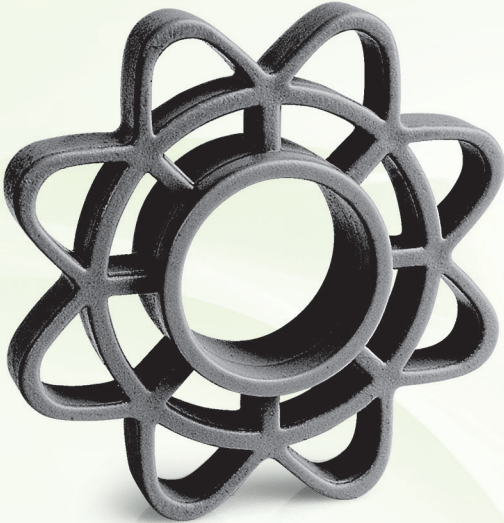

RING SPACERS

It is specially designed for the concrete poles. Its useful for the problem with getting spacers out while vibration because of ring type.They are produced in two type of diameters of hole.

Code	Height	Bar Diameter	Package
11250	15 mm	8 mm	1000 pcs./pack
11251	15 mm	17 mm	1000 pcs./pack
11252	20 mm	15 mm	1000 pcs./pack
11253	20 mm	20 mm	500 pcs./pack

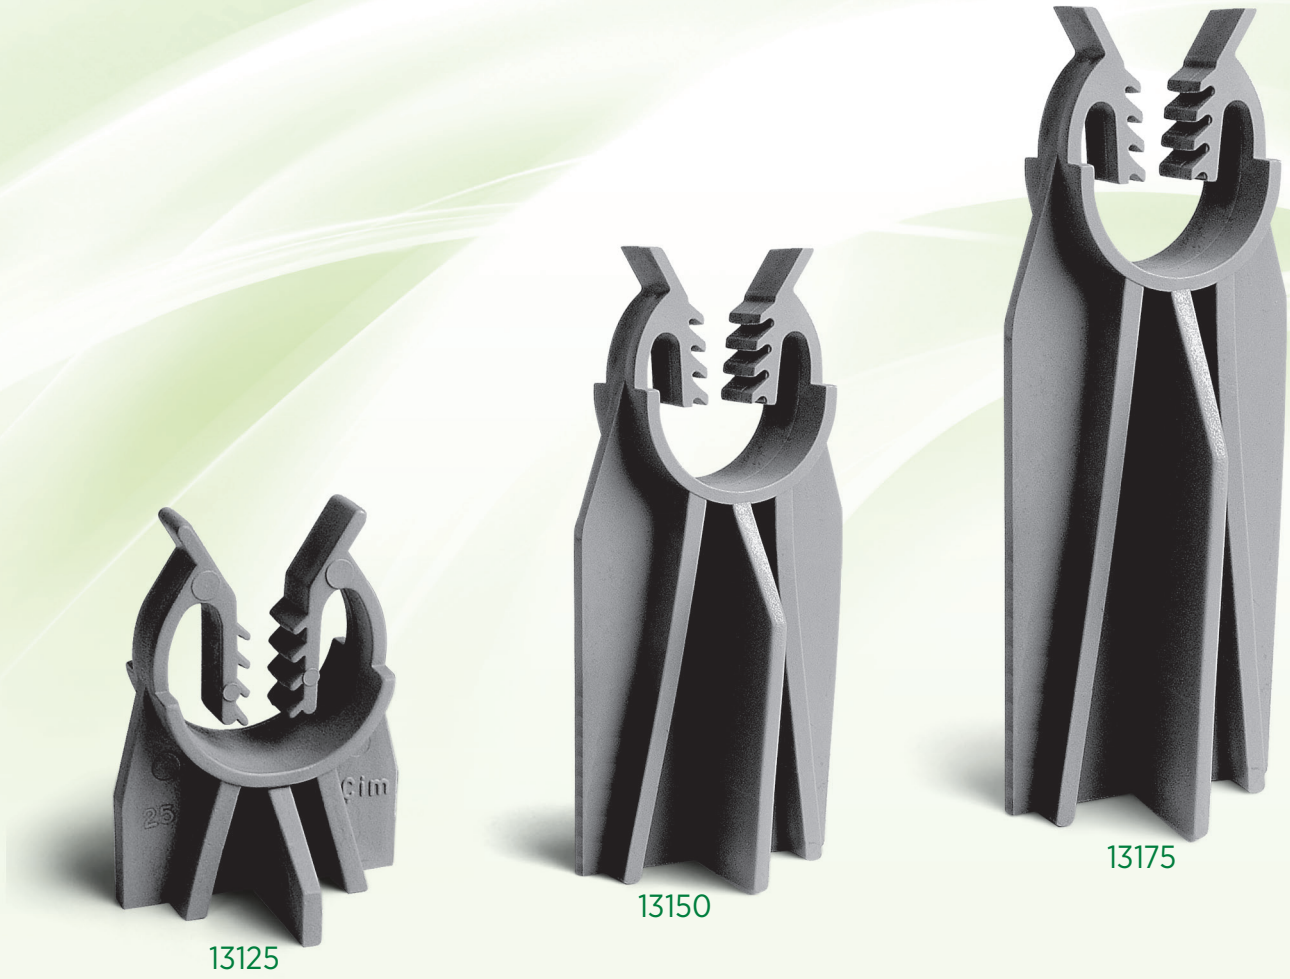


HEAVY REBAR SPACERS

Provide spaces between ground and rebars in foundations. Using them with heavily rebars is so easy. They increase resistance of rebars.

Code	Height	Bar Diameter	Package
13115	15 mm	8-20 mm	1000 pcs./pack
13120	20 mm	8-24 mm	1000 pcs./pack
13125	25 mm	8-24 mm	1000 pcs./pack
13130	30 mm	8-24 mm	1000 pcs./pack
13135	35 mm	8-24 mm	1000 pcs./pack
13140	40 mm	8-24 mm	1000 pcs./pack
13150	50 mm	8-24 mm	500 pcs./pack
13175	75 mm	10-28 mm	500 pcs./pack
13190	100 mm	10-28 mm	350 pcs./pack
13195	150 mm	10-28 mm	150 pcs./pack
13450	50 mm	20-32 mm	500 pcs./pack
13475	75 mm	20-32 mm	300 pcs./pack
13490	100 mm	20-32 mm	250 pcs./pack

REBAR CLIPS

Used in beams and slabs for giving a required distance between formwork and rebars. They can be used for the precast applications as well.

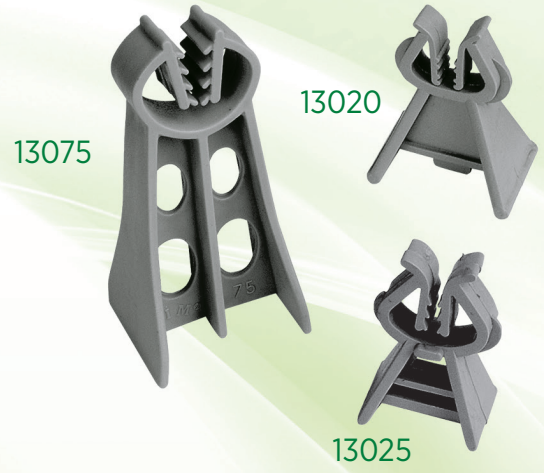

Code	Height	Bar Diameter	Package
13015	15 mm	8-12 mm	1000 pcs./pack
13020	20 mm	6-14 mm	1000 pcs./pack
13025	25 mm	6-14 mm	1000 pcs./pack
13030	30 mm	6-14 mm	1000 pcs./pack
13040	40 mm	6-16 mm	1000 pcs./pack
13050	50 mm	6-16 mm	1000 pcs./pack
13075	75 mm	10-20 mm	500 pcs./pack



CUBIC SPACER

They're used for giving distances between rebars and shatters in foundations or beams or slabs. Spacer has distance size options more than one.

Code	Height	Bar Diameter	Package
13615	15 -25 mm	8-12 mm	1000 pcs./bag
13650	25-30-40-50 mm	8-14 mm	500 pcs./bag

REBAR CLIPS PRECAST TYPE

Used in beams and slabs. Widely used in producing precast elements



Code	Height	Bar Diameter	Package
13215	15 mm	6-12 mm	1000 pcs./bag
13220	20 mm	8-14 mm	1000 pcs./bag



15220

CIRCULAR SPACERS

Make processing in widely slabs and mesh steel applications easier. It can couple the bar easy because of the two projecting parts on the spacer. Placed appropriate distances in the area.

Code	Height	Bar Diameter	Package
15149	15 mm	150 mm	1000 pcs./pack
15220	20 mm	200 mm	500 pcs./pack
15225	25 mm	200 mm	500 pcs./pack

RAIL SPACERS

This type of spacers facilitate applications in widely slabs and using mesh steel. The hook on the spacer couple the bar easily. Placed with appropriate distance in rebars.



14200

Code	Height	Bar Diameter	Package
14150	15 mm	200 mm	1000 pcs./pack
14200	20 mm	200 mm	750 pcs./pack



13530



13515

BISCUIT SPACER

Make processing in widely slabs and mesh steel applications easier. Placed appropriate distances in the area.

Code	Height	Package
13515	15 mm	1000 pcs./bag
13520	20 mm	1000 pcs./bag
13525	25 mm	1000 pcs./bag
13530	30 mm	1000 pcs./bag

11210



11205



11200



PILE CAGE SPACERS

It is a concrete cover type spacers that provides space between rebar and soil. So the rebar is protected from negative factors from soil.

Code	Height	Bar Diameter	Package
11200	50 mm	8-12 mm	250 pcs./pack
11205	75 mm	8-16 mm	100 pcs./pack
11210	75 mm	16 mm/close	125 pcs./pack

11201



11202



11203




ANCHOR ROPE SEPERATOR CONNECTOR ELEMENTS

They seperate or connect the anchor ropes while their way on anchorage system that makes stronger ground.

Code	Height	Type	Inner Diameter	Package
11201	85 mm	6 Channel	30 mm	500 pcs./bag
11202	60 mm	7 Channel	30 mm	1000 pcs./bag
11203	60 mm	4 Channel	12 mm	1500 pcs./bag
11208	120 mm	Connector	70 mm	-
11209	125 mm	Connector	95 mm	-


15022

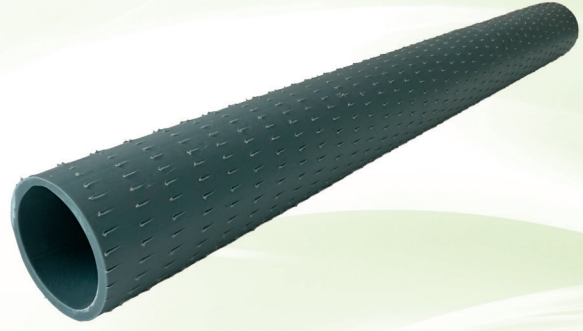

PIPE FOR PROTECTION TIE-ROD

They keep tie-rods out of concrete while castings in wooden or steel form works. So, tie-rod can be used many times. They can be produced any kind of sizes.

Code	Materials	Type	Inner Diameter	Outer Diameter	Package
15018	Polietilen(PE)	Smooth/Rough	18 mm	21 mm	150 mt./bend
15022	Polietilen(PE)	Smooth/Rough	22 mm	25 mm	150 mt./bend
15022/26	Polietilen(PE)	Smooth/Rough	22 mm	26 mm	150 mt./bend
15026	Polietilen(PE)	Smooth/Rough	26 mm	30 mm	75 mt./bend
15026/32	Polietilen(PE)	Smooth/Rough	26 mm	32 mm	75 mt./bend
15028	Polietilen(PE)	Smooth/Rough	28 mm	32 mm	75 mt./bend
15022/K	Polietilen(PE)	Smooth/Rough	22 mm	28 mm	75 mt./bend

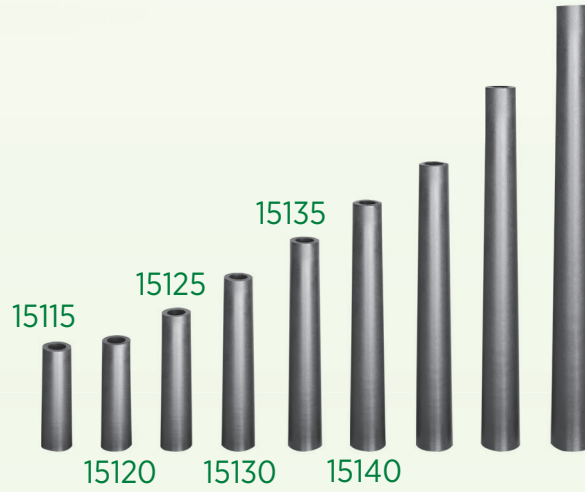

TIE-ROD CONICAL

Used for protection tie rods to touch concrete on the vertical shatters. They can be produced different sizes based on the order.

Code	Materials	Iron Diameter	Bar Diameter	Package
15120	PA	20 mm	20 cm	100 pcs./bag
15125	PA	20 mm	25 cm	100 pcs./bag
15130	PA	20 mm	30 cm	100 pcs./bag
15140	PA	20 mm	40 cm	50 pcs./bag
15140/H	PA	20 mm	50 cm	25 pcs./bag
15140/I	PA	20 mm	55 cm	25 pcs./bag
15140/K	PA	20 mm	60 cm	25 pcs./bag

16022

PLASTIC CONE FOR PIPE

They are fixed on the edge of pipe for protection tie-rod and prevent tie-rod from any kind of leakage. Angles and gap on it can be filled easily by filling materials.



Code	Height	Bar Diameter	Package
16018	18 mm	15 mm	1000 pcs./pack
16022	22 mm	19 mm	1000 pcs./pack
16026	26 mm	23 mm	1000 pcs./pack
16028	28 mm	25 mm	500 pcs./pack



17125



17122

CONIC STOPPER

Used for closing plunge holes on plywoods. Also, they are used for closing hole on thruty cones.

Code	Tapper Diameter	Tapper Height	Package
17118	18 mm	18 mm	1000 pcs./pack
17119	18 mm	12 mm	1000 pcs./pack
17122	22 mm	20 mm	1000 pcs./pack
17124	21 mm	15 mm	1000 pcs./pack
17125	25 mm	20 mm	1000 pcs./pack

PIPE STOPPER WITH CAP

A plastic element is used for closing holes in plywoods. It is useful for assembling or disassembling because of cap.



Code	Tapper Diameter	Tapper Height	Package
17218	18 mm	16 mm	1000 pcs./pack
17222	22 mm	16 mm	1000 pcs./pack
17228	28 mm	16 mm	1000 pcs./pack



16122

CONICAL HEAD WITH STOPPER

It is used for protection thruty tubes from leaking concrete. There is a special stopper for closing the hole after finishing the work.

Code	Inner Diameter	Outer Diameter	Package
16122	22 mm	19 mm	1000 pcs./pack

REDUCTOR CAP OF WATER STOPPER

They connect pvc pipes for tie-rods to water stopper use in buildings contact to water buildings like a pool or dam exc.



16125

Code	Size A	Size B	Package
16125	22 mm	28 mm	1000 pcs./pack



27031



27030



27031/A




27030/A


PVC CHAMFERS WITH AND WITHOUT EDGE

This material which is produced PVC raw material is used for chamfered sharp corners of columns and beams. There are two types which are with nailing edge and without nailing edge on manufacturing.

Colour	Code	Type	Package
WHITE	27020	WITHOUT EDGE	150 mt./bend
WHITE	27021	WITH EDGE	150 mt./bend
WHITE	27030	WITHOUT EDGE	150 mt./bend
WHITE	27031	WITH EDGE	150 mt./bend
WHITE	27034	WITHOUT EDGE	75 mt./bend
WHITE	27035	WITH EDGE	75 mt./bend
BROWN	27020/A	WITHOUT EDGE	150 mt./bend
BROWN	27021/A	WITH EDGE	150 mt./bend
BROWN	27030/A	WITHOUT EDGE	150 mt./bend
BROWN	27031/A	WITH EDGE	150 mt./bend
BROWN	27034/A	WITHOUT EDGE	75 mt./bend
BROWN	27035/A	WITH EDGE	75 mt./bend

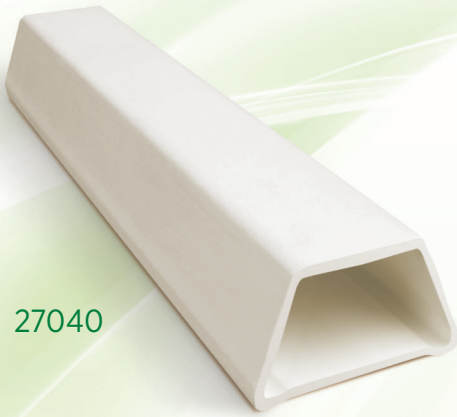

27040

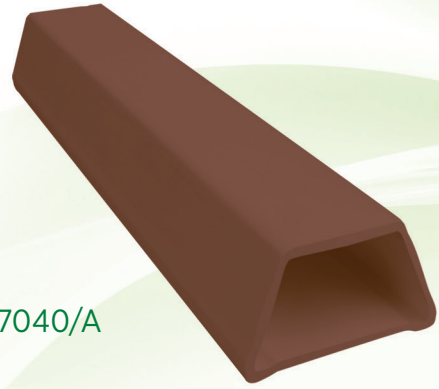

27040/A


TRAPEZ CHAMFERS

The main point for using is creating appropriate gaps in concrete structures. It is produced from PVC raw material and it resistant to impacts.

Colour	Code	Size A	Size B	Height	Package
WHITE	27040	25 mm	15 mm	15 mm	150 mt./bend
WHITE	27041	50 mm	20 mm	20 mm	75 mt./bend
BROWN	27040/A	25 mm	15 mm	15 mm	150 mt./bend
BROWN	27041/A	50 mm	20 mm	20 mm	75 mt./bend


T PROFILE

Used for filling the gap between plywood shatters and protect concrete leak out. It makes shape of concrete great after removing shatters. It is produced in standart length of 3 meters and can be produced in special lengths.

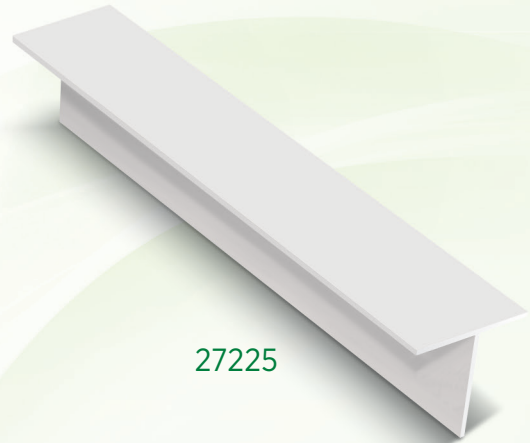

27225

Code	Size A	Height	Package
27225	15 mm	15 mm	150 mt./bend

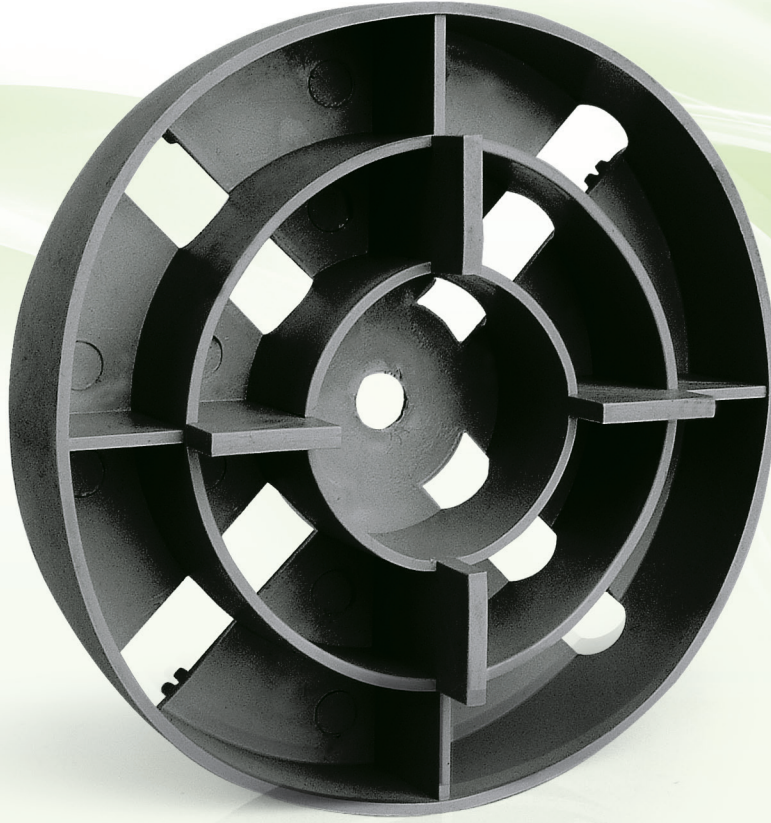

06300

SQUARE CEMENT FLOOR TYPE MONTAGE ELEMENT

It is a floor equipment used for square cement elements in wide areas. The main purpose of this using this material is protecting isolation material on it from rainy, snowy and cold weather conditions. It can create equal heights and gaps between cement elements and ground that covered with isolation material. Water can be transferred out from isolation material because of the fact that there are channels on the bottom of the product.

Code	Height	Diameter	Package
06300	30 mm	135 mm	150 pcs./pack
06313	13 mm	140 mm	225 pcs./pack
06320	20 mm	140 mm	180 pcs./pack

02200



SEGMENT IN TUNNEL ANCHOR

Special anchor used to set up block tunnel Precast element. Used with a special bolt and ties tightly the separate tunnel blocks with a single apparatus. Increases the uniting quality of blocks. The power of bold should be 50 kN.

Code	Size	Package
02190	120x24 mm	400 pcs./bag
02200	140x24 mm	400 pcs./bag

CONCRETE INJECTION ELEMENT FOR TUNNELS

They are used to transfer concrete to rear blank zones after precast segments are installed in tunnel constructions.



02135

Code	Size (h)	Package
02135	135 mm	100 pcs./bag
02185	85 mm	100 pcs./bag

02210

RAIL ANCHOR

It is an anchor used when steel rail is assembled to concrete traverse.



Code	Size	Package
02210	140x25 mm	1000 pcs./box



02215

RAIL ANCHOR CAP

It is a cap used to fill the blank on the hole where the top of the anchors are used in rail segment productions.

Code	Diameter	Size (h)	Package
02215	25 mm	16 mm	1000 pcs./pack



17300

17301

SAFETY CAP FOR TIE-ROT BAR (MUSHROOM TYPE)

Manufactured for safety. It is used on top of tie-rot bars or rebars at construction site. Produced with two colours are Red and Orange. There are two types.

Code	Usable Iron Diameter	Package
17300	17-24 mm	100 pcs./bag
17301	8-16 mm	500 pcs./bag
17300/32	17-32 mm	100 pcs./bag

SAFETY CAP FOR TIE-ROT BAR (SANDGLASS TYPE)

Manufactured for safety. It is used on top of tie-rot bars or rebars at construction site. Produced with two colours are Red and Orange. There are two types.




17303

17302

Code	Usable Iron Diameter	Package
17302	8-16 mm	500 pcs./pack
17303	16-30 mm	250 pcs./pack

TRAPEZ BOLT ANCHOR

It is an anchor related to bolt is used for grounding in rail constructions.

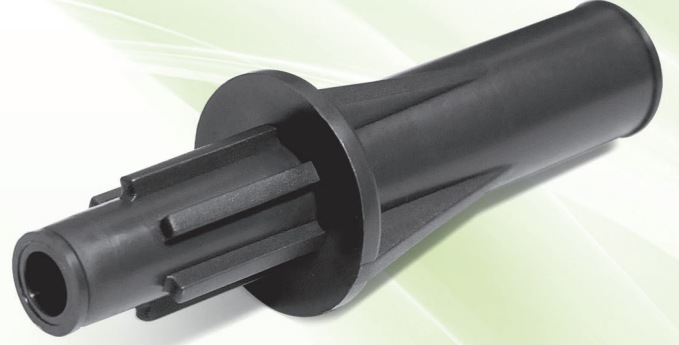

02188

Code	Size (h)	Package
02188	95 mm	500 pcs./pack



15000

TIE-ROT BAR

These bars are used to connect with two shatters regarding to space is shown on Project. All sizes can be produced based on order.

Code	Size	Diameter	Package
15000	100 cm	17 mm	10 pcs./bend
15009	120 cm	17 mm	10 pcs./bend
15010	150 cm	17 mm	10 pcs./bend
15013	200 cm	17 mm	10 pcs./bend



15001

ANCHOR NUT

Used in both ends of tie-rod. Highly resistant and long lasting since it's production of sfero moulding. The flanzge size is 90 mm. Wide diameter does not wear off the block.

Code	Material	Screw Diameter	Flange Diameter	Package
15001	Sfero	17 mm	17 mm	50 pcs./bag



15101

TIE-ROT PLATE

Manufactured from 4 mm. There are chambers on its body to increase its strenght. It prevents over pressure of needle-rot nut to the formwork related damages during formwork assembly or disassembly.

Code	Package
15101	50 pcs./bag

WATER STOPPER (THERE ARE TWO TYPES OF WATER STOPPER)

Used for protecting to leak water out between shatters.



Code	Material	Iron Diameter	Package
15002	Sfero	17 mm	50 pcs./bag
15090	Nylon 6	17 mm	50 pcs./bag



SPRING CLAMP

It is an auxiliary element used to keep the horizontal and column block shatters at the same distance. It protect removing shatters when it is used rebars are clamped. Gears in product are hard so it is long lasting.

Code	Type	Package
15004	Without Galvanised	50 pcs./bag
15005	Galvanised	50 pcs./bag



ÇİM®
PLASTİK

invisible heroes
of structures

Head Office/Fabric:

Saray Mh. 123 Cd. No:12
Kahramankazan 06980
ANKARA / TÜRKİYE

Contact:

T 0090 543 311 76 00

Mail:

bilgi@cim.com.tr